


A. TECHNICAL INFORMATION

1. Common features

| | |
|----------------------|---|
| Body | Pressed Steel |
| Finishing | White / Silver |
| Lighting outlet | 1 / 2 / 3 depending on configuration |
| Type of installation | Ceiling Recessed via mounting clips |
| Net weight | Single = 940g / Twin = 1300g / Triple = 1450g |
| Life (L70) | 25'000 hours |
| IP/IK rating | IP20 / IK03 |
| LED module | Replaceable – 15W E-CORE AR111 (G53) |
| Approval Mark | CE / ENEC |
| Ambient Temp. Range | +5°C / +35°C |

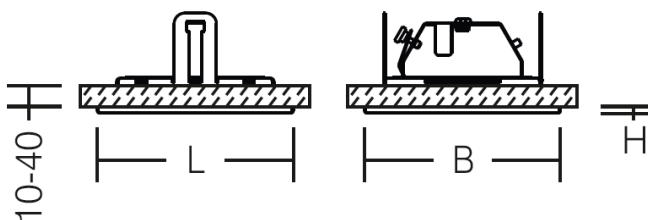


Single - L = 180 B = 180 H = 93
 Twin - L = 320 B = 180 H = 93
 Triple - L = 480 B = 180 H = 93

COMBINATIONS

| Model Name | LEDEUS00013C | LEDEUS00014C | LEDEUS00015C | LEDEUS00016C | LEDEUS00017C | LEDEUS00018C | LEDEUS00019C | LEDEUS00020C |
|-------------|---------------|---------------|---------------------------|---------------|---------------------------|---------------|---------------------------|---------------|
| EAN CODE | 4974550446051 | 4974550446068 | 4974550446075 | 4974550446082 | 4974550446099 | 4974550446105 | 4974550446112 | 4974550446129 |
| Description | LAMP FITTING | | FRAME for *1 LAMP FITTING | | FRAME for *2 LAMP FITTING | | FRAME for *3 LAMP FITTING | |
| Appearance | | | | | | | | |
| Colour | White | Silver | White | Silver | White | Silver | White | Silver |

Ordering Information

*1 LAMP FITTING



*2 LAMP FITTING



*3 LAMP FITTING



Lamp frame includes transformer. Order components separately


2. General Lighting

a. Electrical features / Control

| Model Name | Recessed Gimble |
|--------------------------|----------------------------------|
| Rated Voltage (V) | 220-240 |
| Rated Wattage (W) | 15W per lamp module |
| Frequency (Hz) | 50/60 |
| Rated Input Current (mA) | 1750 per lamp module |
| Power Factor | > 0.7 |
| Dimming / CLO | No / No |
| Connection | 2 * (0,75 - 2,5) mm ² |

b. Optical features

| Model Name | LDRA1527MG5EU | LDRA1530MG5EU | LDRA1550MG5EU |
|-----------------------------|---------------|---------------|---------------|
| EAN CODE | 4974550437530 | 4974550437547 | 4974550437554 |
| Rated Voltage (V) | 12V AC | 12V AC | 12V AC |
| Rated Wattage (W) | 15 | 15 | 15 |
| Luminous Flux (lm) | 750 | 800 | 900 |
| Colour Description | Warm White | Warm White | Neutral White |
| Colour Temperature (K) | 2700 | 3000 | 5000 |
| Colour Rendering Index (Ra) | 80 | 80 | 72 |
| Beam Angle | 24 | 24 | 24 |
| Luminous Intensity (cd) | 3600 | 3850 | 4300 |
| Rated Lifetime (h) | 25000 | 25000 | 25000 |
| Dimming | Non-Dimmable | Non-Dimmable | Non-Dimmable |

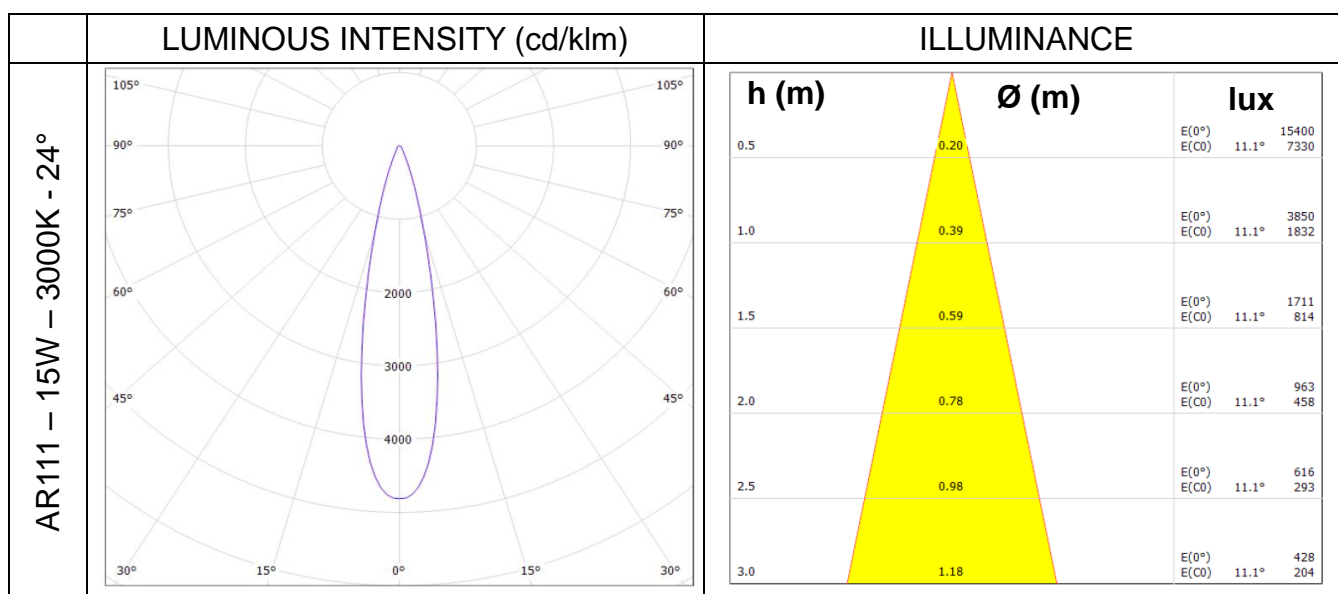

Please refer to AR111 Datasheet for Recessed Gimble fixture only used in conjunction with alternative lamp colour temperatures

LOGISTICS

1. Logistic data

| Product code | EAN Code | Description | Size of Packaging (L * H * W) (mm) | Gross weight (g) |
|--------------|---------------|-------------------------------------|------------------------------------|------------------|
| LEDEUS00013C | 4974550446051 | Recess Gimble Lamp Fitting - White | 145 x 145 x 190 | 490 |
| LEDEUS00014C | 4974550446068 | Recess Gimble Lamp Fitting - Silver | 145 x 145 x 190 | 490 |
| LEDEUS00015C | 4974550446075 | Recess Gimble Frame x 1 - White | 205 x 205 x 120 | 650 |
| LEDEUS00016C | 4974550446082 | Recess Gimble Frame x 1 - Silver | 205 x 205 x 120 | 650 |
| LEDEUS00017C | 4974550446099 | Recess Gimble Frame x 2 - White | 360 x 225 x 110 | 1140 |
| LEDEUS00018C | 4974550446105 | Recess Gimble Frame x 2 - Silver | 360 x 225 x 110 | 1140 |
| LEDEUS00019C | 4974550446112 | Recess Gimble Frame x 3 - White | 620 x 200 x 105 | 1480 |
| LEDEUS00020C | 4974550446129 | Recess Gimble Frame x 3 - Silver | 620 x 200 x 105 | 1480 |

2. Packaging content

- Lamp Fitting – Lamp fitting + lamp holder + transformer
- Frame – Frame + instruction sheet

B. IMPORTANT NOTES

E-CORE AR111 15W Lamps range

| Model Name | LDRA1527MG5EU | LDRA1530MG5EU | LDRA1550MG5EU |
|-----------------------------|---------------|---------------|---------------|
| EAN CODE | 4974550437530 | 4974550437547 | 4974550437554 |
| Rated Voltage (V) | 12V AC | 12V AC | 12V AC |
| Rated Wattage (W) | 15 | 15 | 15 |
| Luminous Flux (lm) | 750 | 800 | 900 |
| Colour Description | Warm White | Warm White | Neutral White |
| Colour Temperature (K) | 2700 | 3000 | 5000 |
| Colour Rendering Index (Ra) | 80 | 80 | 72 |
| Beam Angle | 24 | 24 | 24 |
| Luminous Intensity (cd) | 3600 | 3850 | 4300 |
| Rated Lifetime (h) | 25000 | 25000 | 25000 |
| Dimming | Non-Dimmable | Non-Dimmable | Non-Dimmable |

